

ELiMENTS

Windows , Doors & Conservatorys

CE

DoP

Declaration of Performance documents

Bell Farm, Riccall Road, Escrick, York, YO19 6ED



Declaration of Performance



Eliments Ltd.
Bell Farm, Riccall Road
Escrick, York. YO19 6ED. UK
13
DoP No: 1- 20/06/13

VEKA Matrix FS Internally Glazed Casement Window,
Intended for use in domestic or commercial refurbishment or new building applications.

Annex ZA.1 of BS EN 14351-1:2006+A1:2010

Watertightness: NPD

Dangerous substances: None released under normal use.

Resistance to wind load: NPD

Load-bearing capacity of safety devices: Pass, 350N when fitted (1)

Acoustic performance: NPD

Thermal transmittance: $\leq 2 \text{ W/m}^2\text{k}$

Radiation Properties: NPD

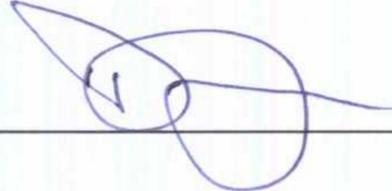
Air permeability: NPD

A Factory Production Control (FPC) system is established, documented and maintained in accordance with AVCP System 3 as per Annex ZA.2 of BS EN 14351-1:2006+A1:2010.

(1) Report No. 191795 dated 13.05.2010 for Safety & Security friction hinges with built in restrictor - BSI, Notified Test Body No. 0621 and EC Notified body No. 1104

(2) Thermal Transmittance calculation approved by Buildcheck, Notified Test Body No. 1806, Ref Report No. CU13238-1 dated 18.06.2013

Danny Hogan
Name (Print)


Signed

MANAGING DIRECTOR
Position

20/6/13
Date

Declaration of Performance



Eliments Ltd.
Bell Farm, Riccall Road
Escrick, York. YO19 6ED. UK
13
DoP No: 2- 20/06/13

VEKA Matrix FS Internally Glazed Tilt & Turn Window,
Intended for use in domestic or commercial refurbishment or new building applications.

Annex ZA.1 of BS EN 14351-1:2006+A1:2010

Watertightness: NPD

Dangerous substances: None released under normal use.

Resistance to wind load: NPD

Load-bearing capacity of safety devices: Pass, 350N when fitted (1)

Acoustic performance: NPD

Thermal transmittance: $\leq 2 \text{ W/m}^2\text{k}$

Radiation Properties: NPD

Air permeability: NPD

A Factory Production Control (FPC) system is established, documented and maintained in accordance with AVCP System 3 as per Annex ZA.2 of BS EN 14351-1:2006+A1:2010.

- (1) Report No. 228/6036771 dated 07.04.2011 for Safety & Security tilt and turn gear
- (2) Thermal Transmittance calculation approved by Buildcheck, Notified Test Body No. 1806, Ref Report No. CU13238-3 dated 18.06.2013

DANNY HOGAN

Name (Print)

Signed

MANAGING DIRECTOR

Position

Date

20/6/13

Declaration of Performance



Eliments Ltd.
Bell Farm, Riccall Road
Escrick, York. YO19 6ED. UK
13
DoP No: 3- 20/06/13

VEKA Matrix FS Internally Glazed Residential Door,
Intended for use in domestic or commercial refurbishment or new building applications.

Annex ZA.1 of BS EN 14351-1:2006+A1:2010

Watertightness: NPD

Dangerous substances: None released under normal use.

Resistance to wind load: NPD

Load-bearing capacity of safety devices: Pass, 350N when fitted (1)

Acoustic performance: NPD

Thermal transmittance: $\leq 2 \text{ W/m}^2\text{k}$

Radiation Properties: NPD

Air permeability: NPD

A Factory Production Control (FPC) system is established, documented and maintained in accordance with AVCP System 3 as per Annex ZA.2 of BS EN 14351-1:2006+A1:2010.

(1) Thermal Transmittance calculation approved by Buildcheck, Notified Test Body No. 1806, Ref Report No. CU13238-7 dated 20.06.2013

DANNY HOGAN

Name (Print)

Signed

MANAGING DIRECTOR

Position

Date

20/6/13